





## CABLES CHAINFLEX®

<b>CABLE DE MANDO</b>											
No. Parte	AWG	No. conduct. y sección en mm <sup>2</sup>	Diámetro exterior [mm]	Revestimiento	Apantallamiento	Rango temp. Móvil [°C]	Rango temp. Estático [°C]	Ignífugo	Resistente al aceite	Radiación UV	Capacidad de torsión
CF130.05.02.UL	20	2 x 0,5	5,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.05.03.UL	20	3 G 0,5	6,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.05.04.UL	20	4 G 0,5	6,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.05.07.UL	20	7 G 0,5	8,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.02.UL	18	2 x 0,75	6,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.03.UL	18	3 G 0,75	6,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.04.UL	18	4 G 0,75	7,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.05.UL	18	5 G 0,75	7,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.07.UL	18	7 G 0,75	8,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.12.UL	18	12 G 0,75	10,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.18.UL	18	18 G 0,75	13,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.07.25.UL	18	25 G 0,75	15,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.10.04.UL	17	4 G 1,0	7,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.10.07.UL	17	7 G 1,0	9,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.10.12.UL	17	12 G 1,0	11,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.10.25.UL	17	25 G 1,0	17,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.15.02.UL	16	2 x 1,5	7,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.15.03.UL	16	3 G 1,5	7,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.15.04.UL	16	4 G 1,5	8,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.15.05.UL	16	5 G 1,5	9,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.15.07.UL	16	7 G 1,5	10,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.15.18.UL	16	18 G 1,5	16,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.25.03.UL	14	3 G 2,5	8,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.25.04.UL	14	4 G 2,5	9,5	PVC		-5 / +70	-20 / +70	✓			✓
CF130.25.07.UL	14	7 G 2,5	13,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.25.12.UL	14	12 G 2,5	16,0	PVC		-5 / +70	-20 / +70	✓			✓
CF130.60.04.UL	10	4 G 6,0	13,5	PVC		-5 / +70	-20 / +70	✓			✓
CF5.15.18	16	18 G 1,5	19,0	PVC		-5 / +70	-20 / +70	✓	✓	✓	✓
CF5.07.36	18	36G 0,75	22,0	PVC		-5 / +70	-20 / +70	✓	✓	✓	✓
CF9.02.03.INI	24	3 X 0,25	4,5	TPE		-35 / +100	-40 / +100		✓	✓	✓


CF9.10.04	17	4 G 1,0	6,5	TPE		-35 / +100	-40 / +100	✓	✓	✓
CF9.15.04	16	4 G 1,5	7,5	TPE		-35 / +100	-40 / +100	✓	✓	✓

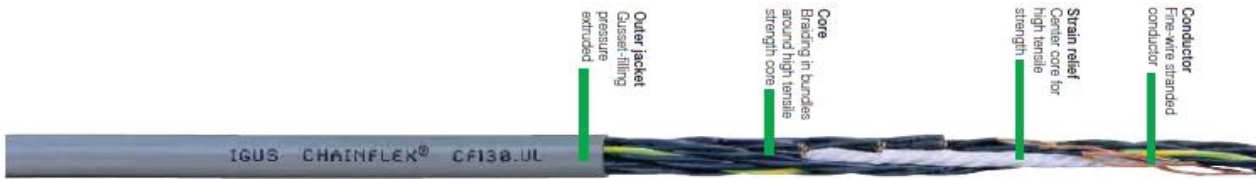


CF140.05.05.UL	20	(5 G 0,5)C	9,0	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.05.18.UL	20	(18 G 0,5)C	13,5	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.07.12.UL	18	(12 G 0,75)C	13,0	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.10.04.UL	17	(4 G 1,0)C	9,5	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.10.05.UL	17	(5 G 1,0)C	10,0	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.10.07.UL	17	(7 G 1,0)C	11,5	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.10.12.UL	17	(12 G 1,0)C	13,5	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.10.18.UL	17	(18 G 1,0)C	16,5	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.10.25.UL	17	(25 G 1,0)C	18,5	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.15.04.UL	16	(4 G 1,5)C	10,0	PVC	✓	-5 / +70	-20 / +70	✓		
CF140.25.04.UL	14	(4 G 2,5)C	12,0	PVC	✓	-5 / +70	-20 / +70	✓		

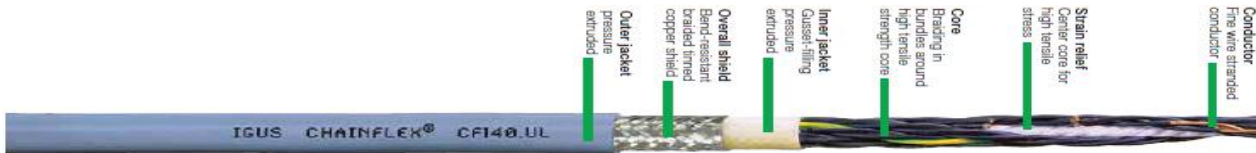

<b>CABLE DE DATOS</b>										
CF240.01.04	26	(4 x 0,14)C	5,0	PVC	✓	-5 / +70	-20 / +70	✓	✓	
CF240.01.05	26	(5 x 0,14)C	5,5	PVC	✓	-5 / +70	-20 / +70	✓	✓	
CF240.02.08	24	(8 x 0,25)C	7,5	PVC	✓	-5 / +70	-20 / +70	✓	✓	

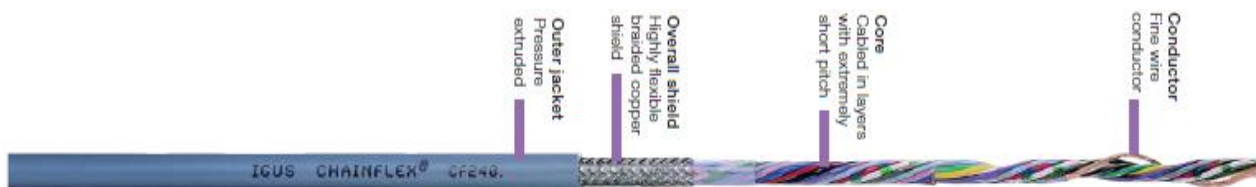

<b>CABLES PARA BUS</b>										
CFBUS.PVC.001	24	1 PR x 0.25	8,0	TPE	✓	-35 / +70	-40 / +70	✓	✓	✓

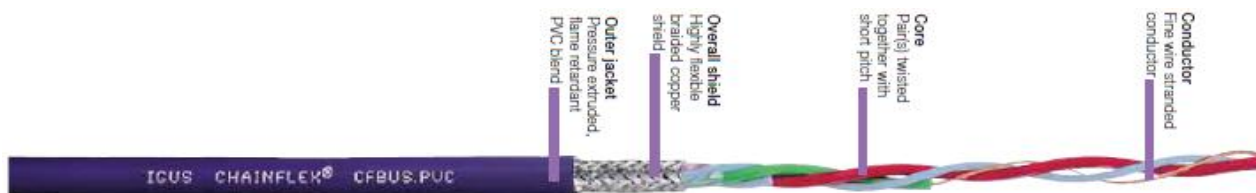

<b>CABLES DE MOTOR</b>											
CF30.25.04	14	4 G 2,5	10,5	PVC		-5 / +70	-20 / +70	✓	✓	✓	
CF30.25.05	14	5 G 2,5	11,5	PVC		-5 / +70	-20 / +70	✓	✓	✓	
CF30.40.04	12	4 G 4,0	12,0	PVC		-4 / +70	-19 / +70	✓	✓	✓	
CF30.40.05	12	5 G 2,0	13,0	PVC		-3 / +70	-18 / +70	✓	✓	✓	
CF30.60.04	10	4 G 6,0	14,0	PVC		-2 / +70	-17 / +70	✓	✓	✓	
CF30.100.04	8	4 G 10,0	17,5	PVC		-1 / +70	-16 / +70	✓	✓	✓	
CF31.60.04	10	(4 G 6,0)C	16,0	PVC	✓	-1 / +70	-16 / +70	✓	✓	✓	
CF31.100.04	8	(4 G 10,0)C	20,5	PVC	✓	-1 / +70	-16 / +70	✓	✓	✓	

